



G-SERIES

Strong . Attractive . Flexible . Durable
Easy to Install . Cost Effective



YUNG KONG VERSATILE FENCE SDN BHD

197401002499 (19842-P)


Lot 1144, Jalan Kemajuan, Pending Industrial Estate,
93450 Kuching Sarawak, Malaysia.

Tel: 082-484-327 Website: www.ykmwgroup.my








PRODUCT SPECIFICATION SHEET (G-SERIES)

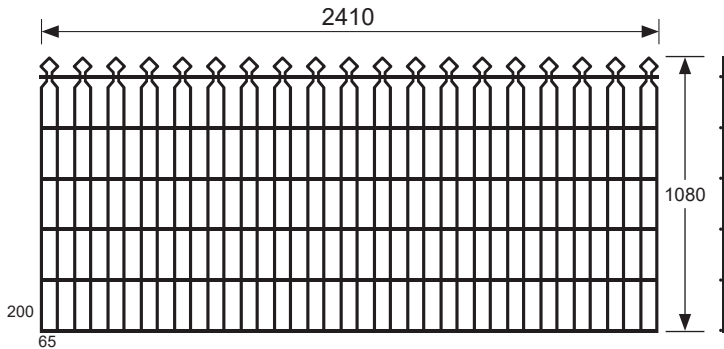

WIRE DIAMETER (mm)	5
HEIGHT (mm)	1080
WIDTH (mm)	2410
SPACING (mm)	65 x 200
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

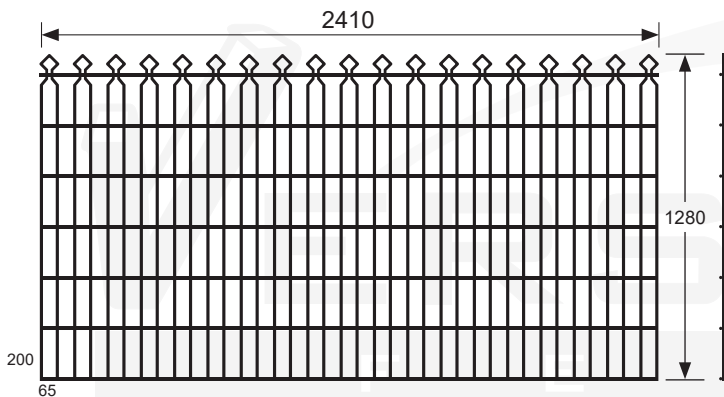


WIRE DIAMETER (mm)	5
HEIGHT (mm)	1280
WIDTH (mm)	2410
SPACING (mm)	65 x 200
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

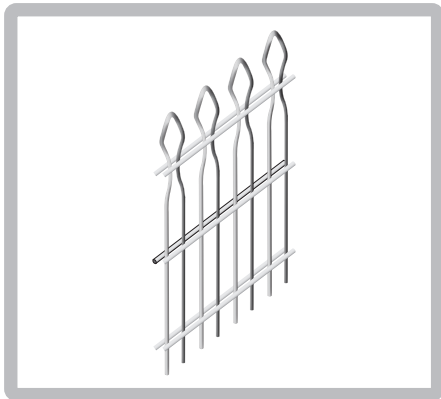


NOTE:


- Versatile Fence is produced and warranted by Yung Kong Versatile Fence Sdn Bhd, which is free from defects in materials, for a period of 5 years from the date of delivery, subject to terms and conditions.
- Minimum zinc coating 290g/m².
- The tolerance for the width and height of the fence is +/- 10mm.
- The tolerance for the diameter of the fence wire is +/- 0.2 mm.

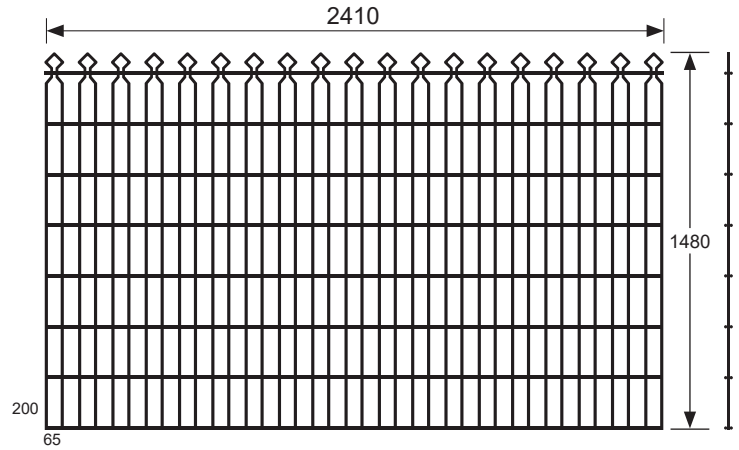

WIRE DIAMETER (mm)	5
HEIGHT (mm)	1480
WIDTH (mm)	2410
SPACING (mm)	65 x 200
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

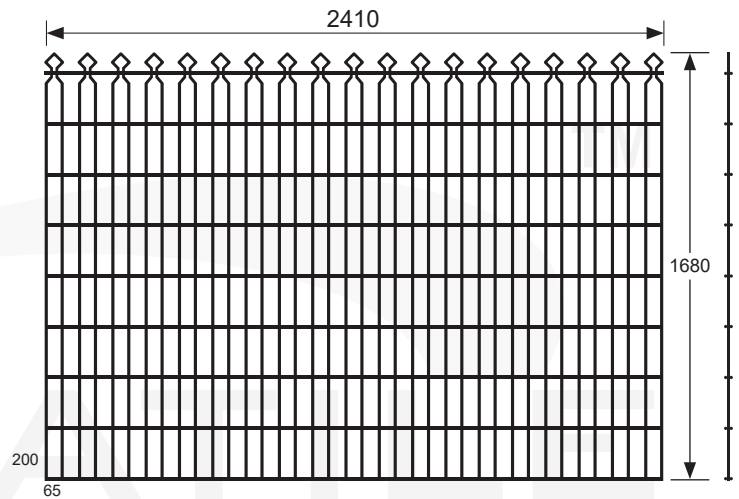

WIRE DIAMETER (mm)	5
HEIGHT (mm)	1680
WIDTH (mm)	2410
SPACING (mm)	65 x 200
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

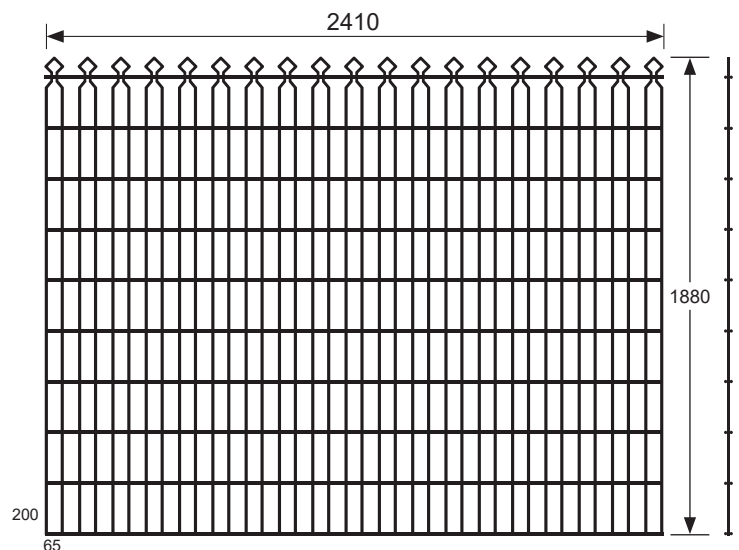

WIRE DIAMETER (mm)	5
HEIGHT (mm)	1880
WIDTH (mm)	2410
SPACING (mm)	65 x 200
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²