



S-SERIES

Strong . Attractive . Flexible . Durable
Easy to Install . Cost Effective . Anti Climb




YUNG KONG VERSATILE FENCE SDN BHD

197401002499 (19842-P)


Lot 1144, Jalan Kemajuan, Pending Industrial Estate,
93450 Kuching Sarawak, Malaysia.

Tel: 082-484-327 Website: www.ykmwgroup.my




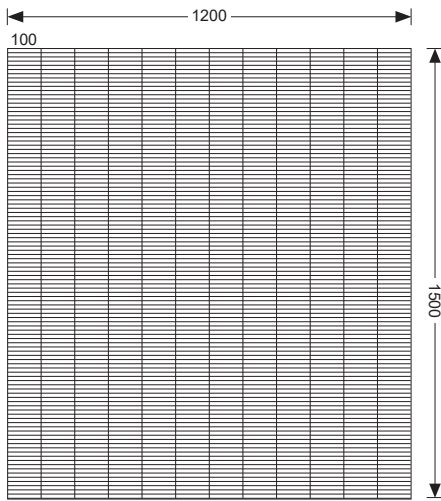

WIRE DIAMETER (mm)	4
HEIGHT (mm)	1500
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ² + PE Colour Coated

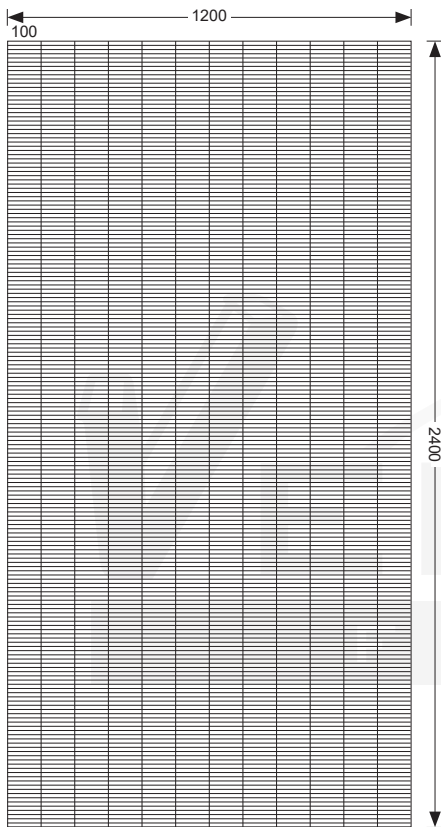


WIRE DIAMETER (mm)	4
HEIGHT (mm)	2400
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ² + PE Colour Coated

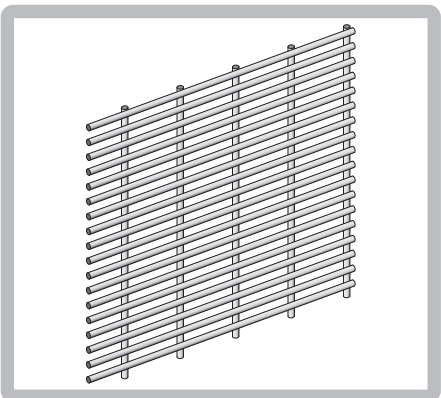


- NOTE:**
- (a) Versatile Fence is produced and warranted by Yung Kong Versatile Fence Sdn Bhd, which is free from defects in materials, for a period of 5 years from the date of delivery, subject to terms and conditions.
- (b) Minimum zinc coating 290g/m².
- (c) The tolerance for the width and height of the fence is +/- 10mm.
- (d) The tolerance for the diameter of the fence wire is +/- 0.2 mm.




PRODUCT SPECIFICATION SHEET (S-SERIES)

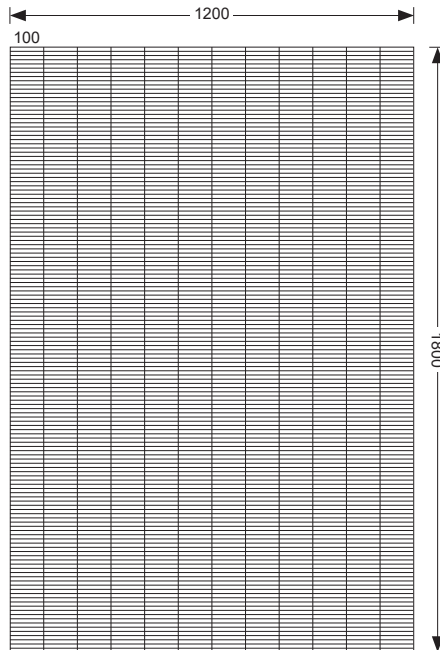


WIRE DIAMETER (mm)	4
HEIGHT (mm)	1800
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ² + PE Colour Coated

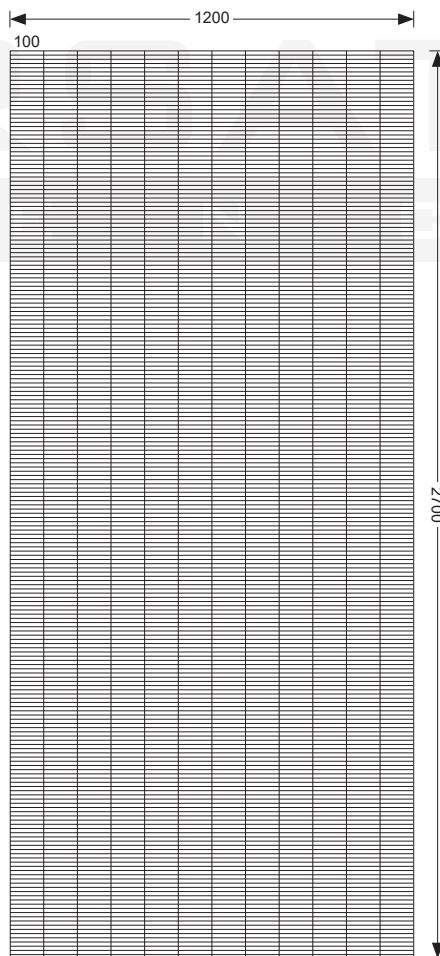

WIRE DIAMETER (mm)	4
HEIGHT (mm)	2700
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ² + PE Colour Coated

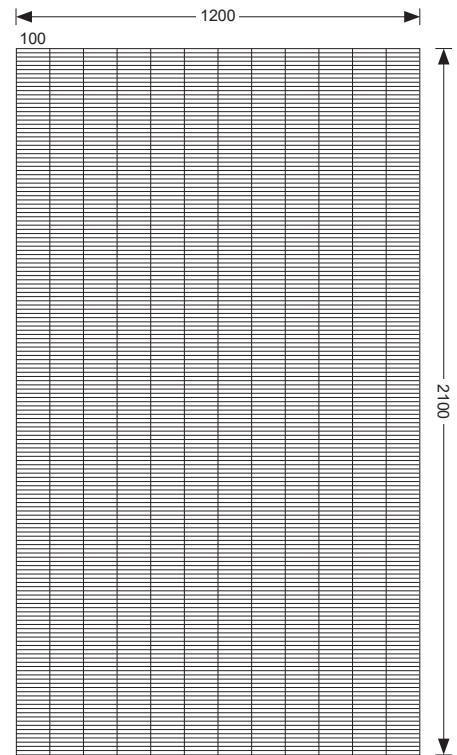

WIRE DIAMETER (mm)	4
HEIGHT (mm)	2100
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ² + PE Colour Coated

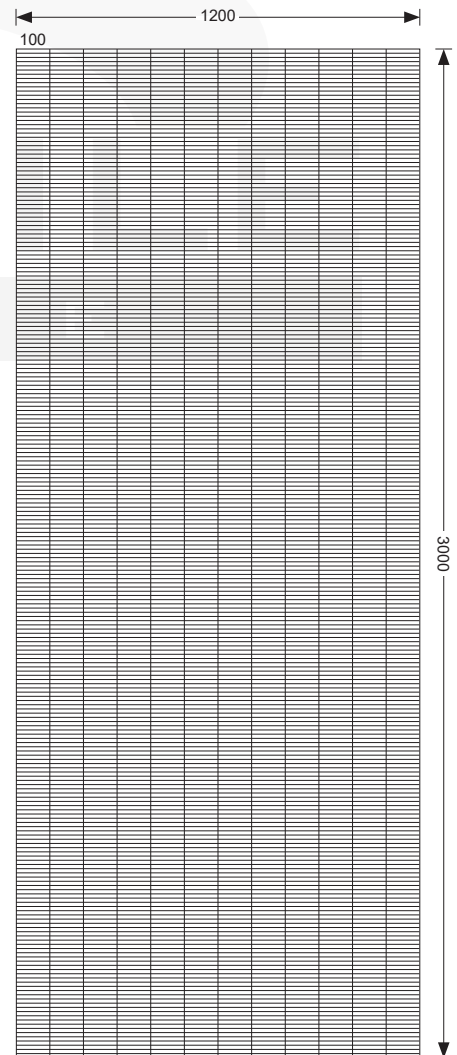

WIRE DIAMETER (mm)	4
HEIGHT (mm)	3000
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ² + PE Colour Coated