



S-SERIES

Strong . Attractive . Flexible . Durable
Easy to Install . Cost Effective . Anti Climb



YUNG KONG VERSATILE FENCE SDN BHD


197401002499 (19842-P)

Lot 1144, Jalan Kemajuan, Pending Industrial Estate,
93450 Kuching Sarawak, Malaysia.


Tel
Fax
Website

8 082-484327
8 082-337177
8 www.ykmwgroup.my



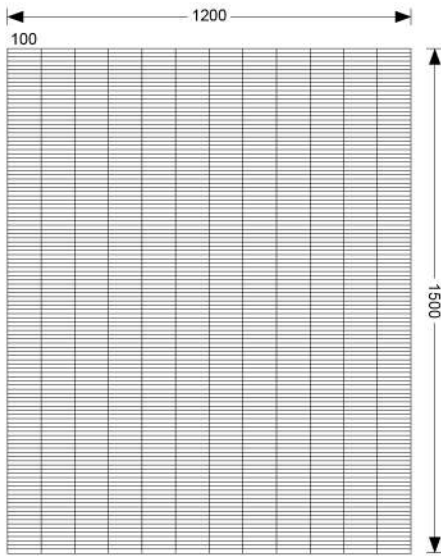


WIRE DIAMETER (mm)	4
HEIGHT (mm)	1500
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY G.I. + PE COLOUR COATED

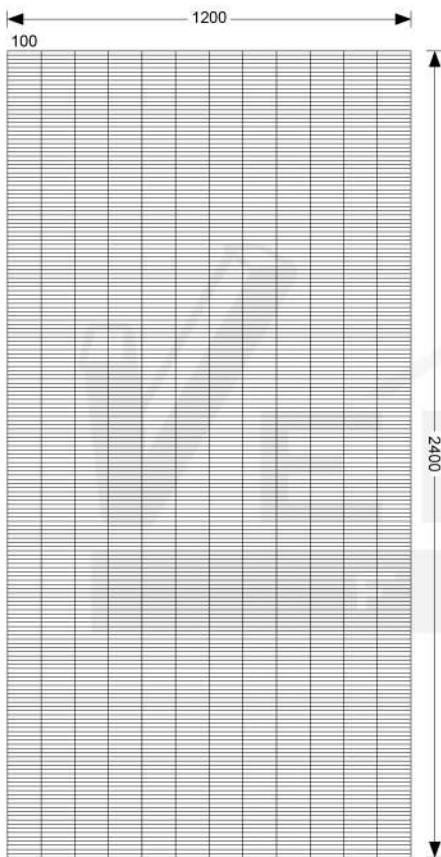


WIRE DIAMETER (mm)	4
HEIGHT (mm)	2400
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY G.I. + PE COLOUR COATED


NOTE:
1. Minimum zinc coating 245g/m²

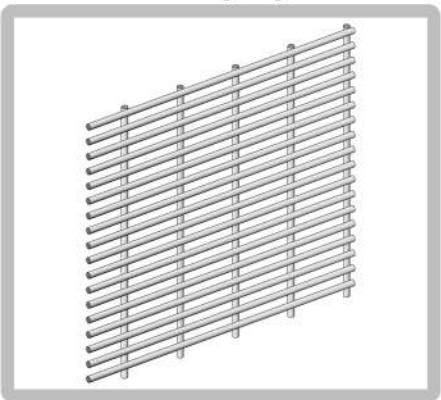


VERSATILE
FENCETM
PRODUCT SPECIFICATION SHEET
(S-SERIES)

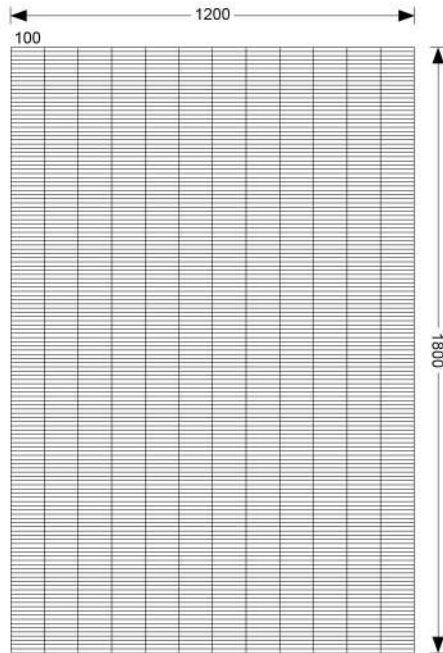


WIRE DIAMETER (mm)	4
HEIGHT (mm)	1800
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY G.I. + PE COLOUR COATED

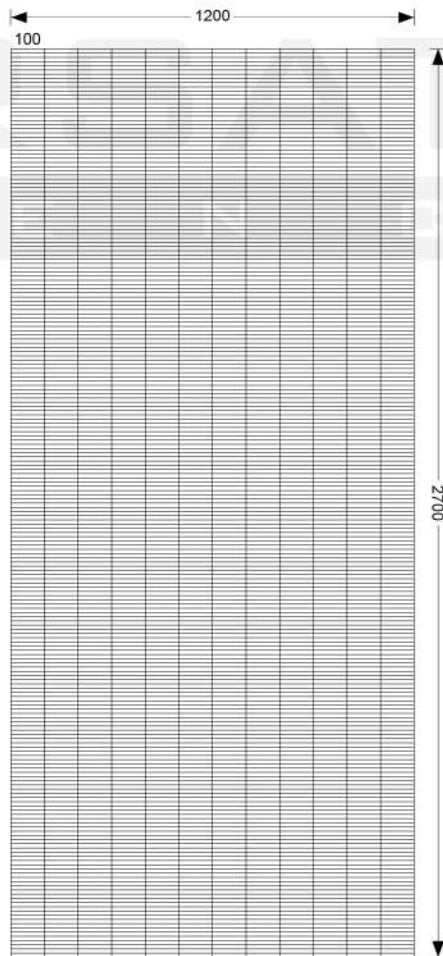

WIRE DIAMETER (mm)	4
HEIGHT (mm)	2700
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY G.I. + PE COLOUR COATED

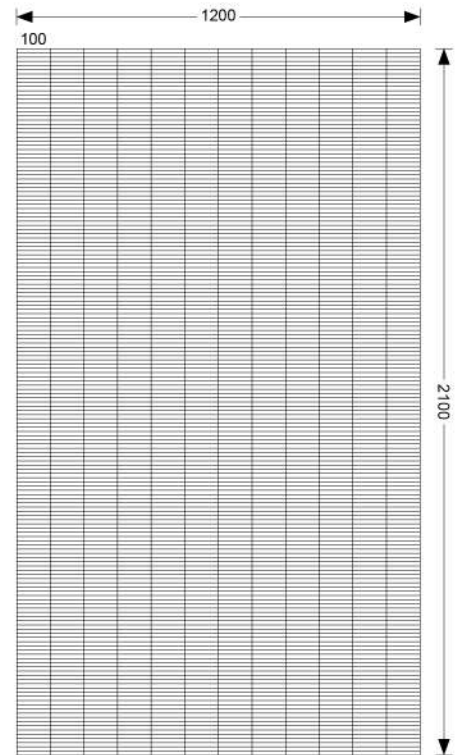

WIRE DIAMETER (mm)	4
HEIGHT (mm)	2100
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY G.I. + PE COLOUR COATED

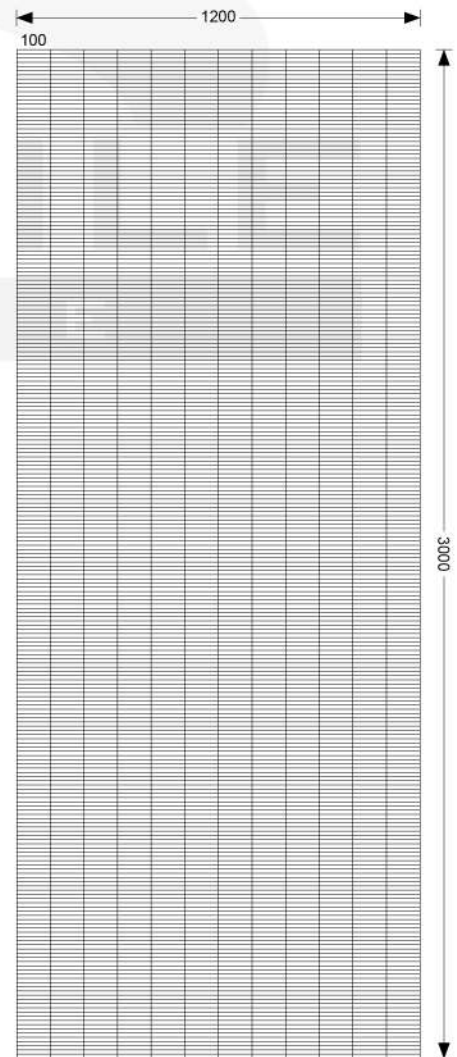

WIRE DIAMETER (mm)	4
HEIGHT (mm)	3000
WIDTH (mm)	1200
SPACING (mm)	12.5 x 100
COATING	HEAVY G.I. + PE COLOUR COATED