



# T2-SERIES

Strong . Attractive . Flexible . Durable  
Easy to Install . Cost Effective



**YUNG KONG VERSATILE FENCE SDN BHD**

197401002499 (19842-P)

Lot 1144, Jalan Kemajuan, Pending Industrial Estate,  
93450 Kuching Sarawak, Malaysia.


Tel: 082-484327 Website: [www.ykmwgroup.my](http://www.ykmwgroup.my)








## PRODUCT SPECIFICATION SHEET (T2-SERIES)

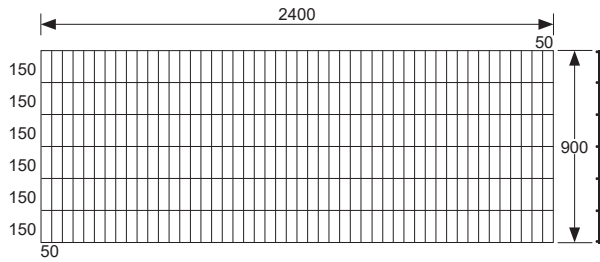


|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| WIRE DIAMETER (mm) | 5                                                                    |
| HEIGHT (mm)        | 900                                                                  |
| WIDTH (mm)         | 2400                                                                 |
| SPACING (mm)       | 50 x 150                                                             |
| COATING            | HEAVY HOT DIP GALVANIZED<br>MINIMUM ZINC COATING 290g/m <sup>2</sup> |


\*Refer to Note (b)

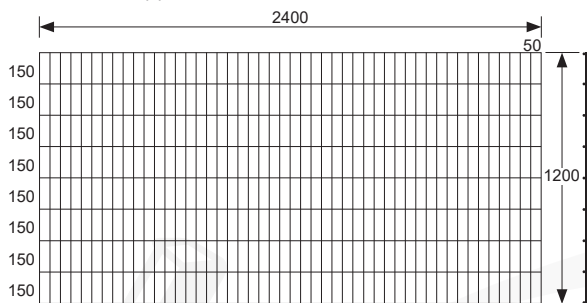


|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| WIRE DIAMETER (mm) | 5                                                                    |
| HEIGHT (mm)        | 1200                                                                 |
| WIDTH (mm)         | 2400                                                                 |
| SPACING (mm)       | 50 x 150                                                             |
| COATING            | HEAVY HOT DIP GALVANIZED<br>MINIMUM ZINC COATING 290g/m <sup>2</sup> |

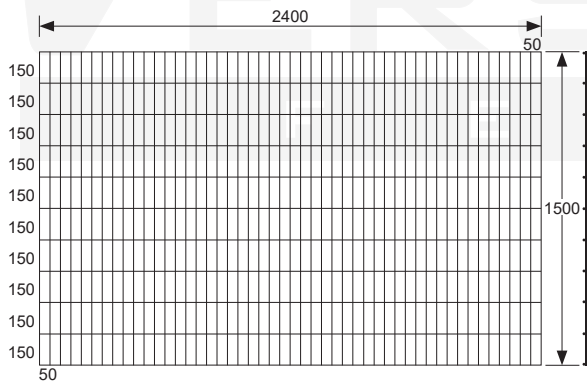


|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| WIRE DIAMETER (mm) | 5                                                                    |
| HEIGHT (mm)        | 1500                                                                 |
| WIDTH (mm)         | 2400                                                                 |
| SPACING (mm)       | 50 x 150                                                             |
| COATING            | HEAVY HOT DIP GALVANIZED<br>MINIMUM ZINC COATING 290g/m <sup>2</sup> |

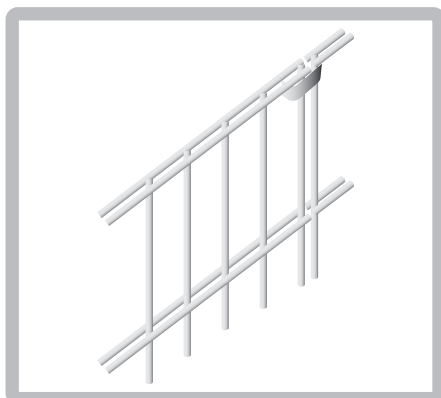


- NOTE:**
- (a) Versatile Fence is produced and warranted by Yung Kong Versatile Fence Sdn Bhd, which is free from defects in materials, for a period of 5 years from the date of delivery, subject to terms and conditions.
  - (b) The 0.9m height of fence is a non-stock item, is accepted for project enquiries only with a minimum order quantity of 100 pieces.
  - (c) Minimum zinc coating 290g/m<sup>2</sup>.
  - (d) The tolerance for the width and height of the fence is +/- 10mm.
  - (e) The tolerance for the diameter of the fence wire is +/- 0.2 mm.

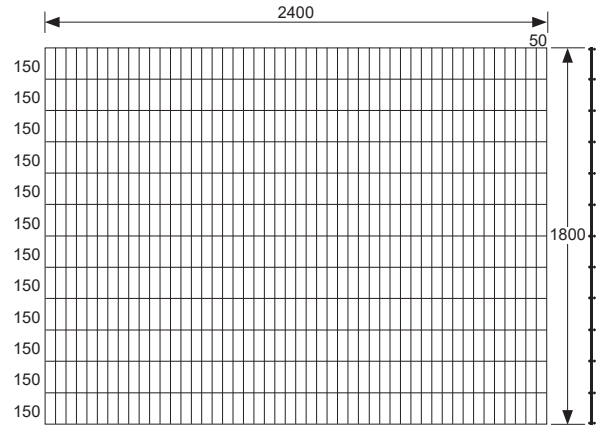

|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| WIRE DIAMETER (mm) | 5                                                                    |
| HEIGHT (mm)        | 1800                                                                 |
| WIDTH (mm)         | 2400                                                                 |
| SPACING (mm)       | 50 x 150                                                             |
| COATING            | HEAVY HOT DIP GALVANIZED<br>MINIMUM ZINC COATING 290g/m <sup>2</sup> |

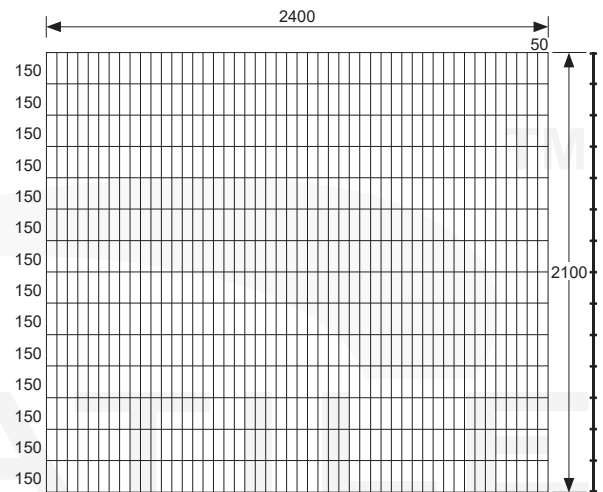

|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| WIRE DIAMETER (mm) | 5                                                                    |
| HEIGHT (mm)        | 2100                                                                 |
| WIDTH (mm)         | 2400                                                                 |
| SPACING (mm)       | 50 x 150                                                             |
| COATING            | HEAVY HOT DIP GALVANIZED<br>MINIMUM ZINC COATING 290g/m <sup>2</sup> |

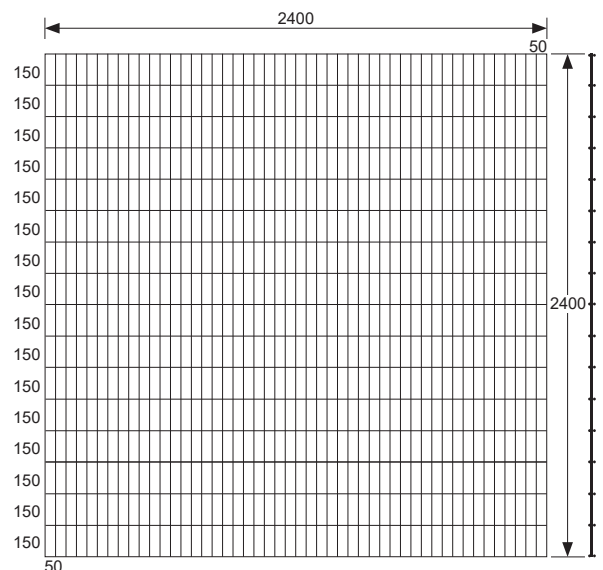

|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| WIRE DIAMETER (mm) | 5                                                                    |
| HEIGHT (mm)        | 2400                                                                 |
| WIDTH (mm)         | 2400                                                                 |
| SPACING (mm)       | 50 x 150                                                             |
| COATING            | HEAVY HOT DIP GALVANIZED<br>MINIMUM ZINC COATING 290g/m <sup>2</sup> |