



V2-SERIES

Strong . Attractive . Flexible . Durable
Easy to Install . Cost Effective



YUNG KONG VERSATILE FENCE SDN BHD

197401002499 (19842-P)


Lot 1144, Jalan Kemajuan, Pending Industrial Estate,
93450 Kuching Sarawak, Malaysia.

Tel: 082-484327 Website: www.ykmwgroup.my






PRODUCT SPECIFICATION SHEET (V2-SERIES)

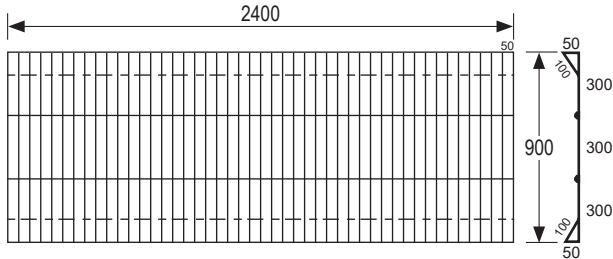


WIRE DIAMETER(mm)	5
HEIGHT(mm)	900
WIDTH(mm)	2400
SPACING(mm)	50x300
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

*Refer to Note (b)

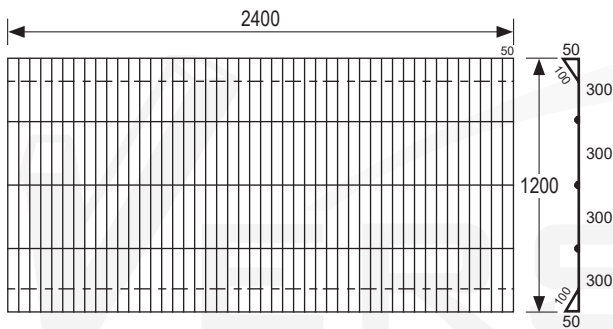


WIRE DIAMETER(mm)	5
HEIGHT(mm)	1200
WIDTH(mm)	2400
SPACING(mm)	50x300
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

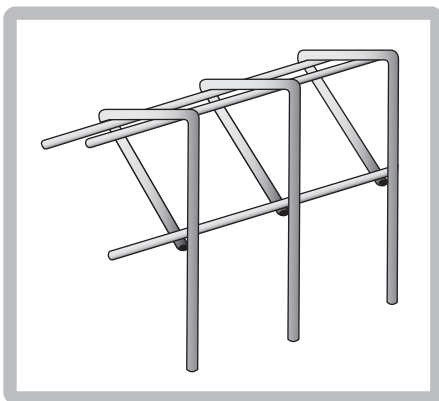


NOTE:


- Versatile Fence is produced and warranted by Yung Kong Versatile Fence Sdn Bhd, which is free from defects in materials, for a period of 5 years from the date of delivery, subject to terms and conditions.
- The 0.9m height of fence is a non-stock item, is accepted for project enquiries only with a minimum order quantity of 100 pieces.
- Minimum zinc coating 290g/m².
- The tolerance for the width and height of the fence is +/- 10mm.
- The tolerance for the diameter of the fence wire is +/- 0.2 mm.

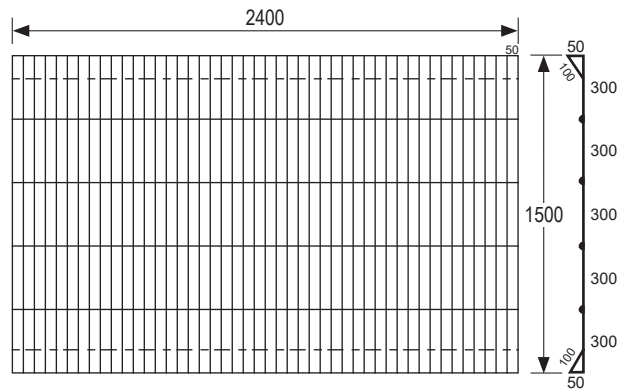

WIRE DIAMETER(mm)	5
HEIGHT(mm)	1500
WIDTH(mm)	2400
SPACING(mm)	50x300
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

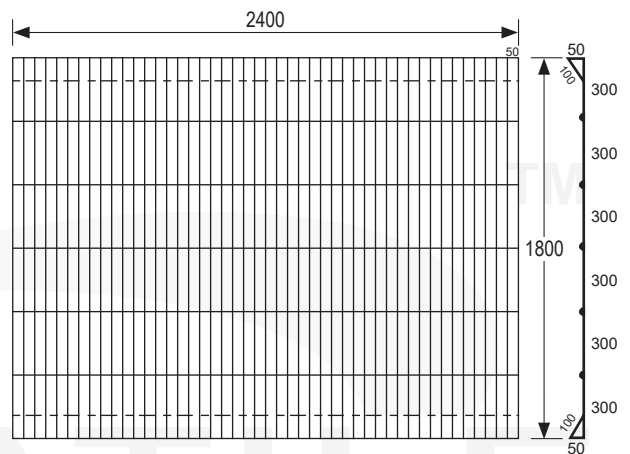

WIRE DIAMETER(mm)	5
HEIGHT(mm)	1800
WIDTH(mm)	2400
SPACING(mm)	50x300
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²

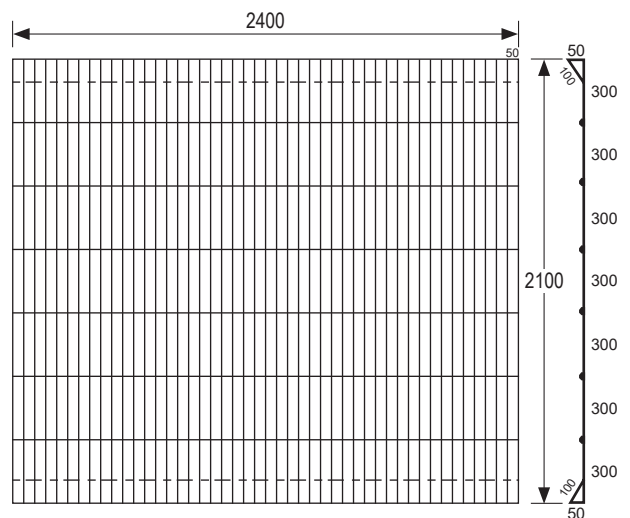

WIRE DIAMETER(mm)	5
HEIGHT(mm)	2100
WIDTH(mm)	2400
SPACING(mm)	50x300
COATING	HEAVY HOT DIP GALVANIZED MINIMUM ZINC COATING 290g/m ²